



GB BOX LOCKERS

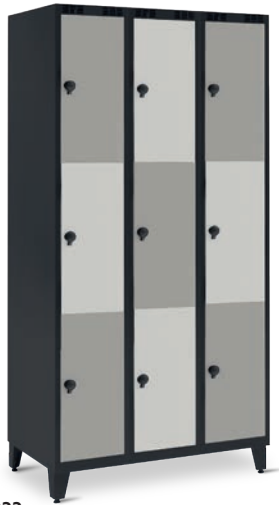

GB33



Wardrobe boxes are ideal for many applications, as they provide many opportunities for separate and locked storage in one solution. The model with 2-4 boxes in height comes with double plate doors. The model with 5-6 boxes in height comes with single plate doors. Wardrobe boxes are particularly suitable as personnel boxes. Other door materials, such as Lexan and acrylic, are optional.

Box lockers GB and GBS




Cabinet height without legs: Flat top 1740 mm and sloping top 1940 mm. Depth 550 mm.

Width of cabinet mm	300	400	600	800	900	1200	1200
Column width mm	300	400	300	400	300	400	300
Internal dimensions HxW mm	800 x 230	800 x 330	800 x 230	800 x 330	800 x 230	800 x 330	800 x 230
Type GB flat top	GB 12-3055	GB 12-4055	GB 22-3055	GB 22-4055	GB 32-3055	GB 32-4055	GB 42-3055
Type GBS sloping top	GBS 12-3055	GBS 12-4055	GBS 22-3055	GBS 22-4055	GBS 32-3055	GBS 32-4055	GBS 42-3055

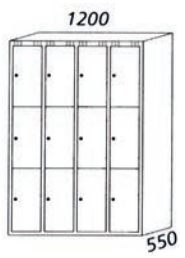


Cabinet height without legs: Flat top 1740 mm and sloping top 1940 mm. Depth 550 mm.

Width of cabinet mm	300	400	600	800	900	1200	1200
Column width mm	300	400	300	400	300	400	300
Internal dimensions HxW mm	500 x 230	500 x 330	500 x 230	500 x 330	500 x 230	500 x 330	500 x 230
Type GB flat top	GB 13-3055	GB 13-4055	GB 23-3055	GB 23-4055	GB 33-3055	GB 33-4055	GB 43-3055
Type GBS sloping top	GBS 13-3055	GBS 13-4055	GBS 23-3055	GBS 23-4055	GBS 33-3055	GBS 33-4055	GBS 43-3055




Cabinet height without legs: Flat top 1740 mm and sloping top 1940 mm. Depth 550 mm.

Width of cabinet mm	300	400	600	800	900	1200	1200
Column width mm	300	400	300	400	300	400	300
Internal dimensions HxW mm	400 x 230	400 x 330	400 x 230	400 x 330	400 x 230	400 x 330	400 x 230
Type GB flat top	GB 14-3055	GB 14-4055	GB 24-3055	GB 24-4055	GB 34-3055	GB 34-4055	GB 44-3055
Type GBS sloping top	GBS 14-3055	GBS 14-4055	GBS 24-3055	GBS 24-4055	GBS 34-3055	GBS 34-4055	GBS 44-3055



Cabinet height without legs: Flat top 1740 mm and sloping top 1940 mm. Depth 550 mm.

Width of cabinet mm	300	400	600	800	900	1200	1200
Column width mm	300	400	300	400	300	400	300
Internal dimensions HxW mm	320 x 230	320 x 330	320 x 230	320 x 330	320 x 230	320 x 330	320 x 230
Type GB flat top	GB 15-3055	GB 15-4055	GB 25-3055	GB 25-4055	GB 35-3055	GB 35-4055	GB 45-3055
Type GBS sloping top	GBS 15-3055	GBS 15-4055	GBS 25-3055	GBS 25-4055	GBS 35-3055	GBS 35-4055	GBS 45-3055



Cabinet height without legs: Flat top 1740 mm and sloping top 1940 mm. Depth 550 mm.

Width of cabinet mm	300	400	600	800	900	1200	1200
Column width mm	300	400	300	400	300	400	300
Internal dimensions HxW mm	250 x 230	250 x 330	250 x 230	250 x 330	250 x 230	250 x 330	250 x 230
Type GB flat top	GB 16-3055	GB 16-4055	GB 26-3055	GB 26-4055	GB 36-3055	GB 36-4055	GB 46-3055
Type GBS sloping top	GBS 16-3055	GBS 16-4055	GBS 26-3055	GBS 26-4055	GBS 36-3055	GBS 36-4055	GBS 46-3055



Standard colours



RAL 7035
Light grey



RAL 5017
Traffic blue

Stocked colors (additional price)



RAL 9010
Pure white



RAL 1015
Light ivory



RAL 7036
Platinum
grey



RAL 7024
Graphite
grey



RAL 9005
Jet black



RAL 1004
Golden
yellow



RAL 3003
Ruby red



RAL 3020
Traffic red



RAL 5001
Green blue



RAL 6025
Fern green

Stocked laminate colors (additional price)



W 450



ARAP 138



F 2296



406 Lucida



F 6466



F 7961



F 2770



F 6467



879 Lucida



F 6468



K 1834



F 7853



F 7884



F 1485



K 1238



K 3210


Other door variants, such as compact laminate, can be produced on request. It is possible to choose any other RAL or NCS colors at an additional price.

Abbreviations and dimensions

H: = Height, W: = Width, D. = Depth,
mm = millimeter, Ø. = diameter.

Unless otherwise specified, all dimensions are in mm.

Reservations are made for printing/typing errors, obsolete items and deviations in product photos or specifications.

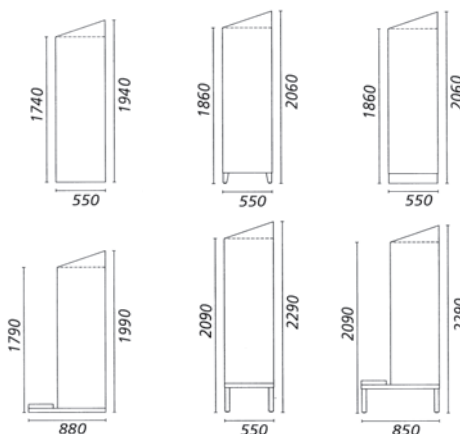

Model GDTS (sloping top) is 2 cm lower on the back edge and 5 cm less deep than GS.





Standard equipment and accessories


■ Standard ○ Accessories

	Charging lockers	G/GS	GD/GDS	GDT/GDTS	GB/GBS	GBF/GBFS	EBF/EBFS	GZ/GZS	RS/RSS	ST/STS	PF	MB	VISION	Golf lockers
 Straight top	■	■ (G)	■ (GD)	■ (GDT)	■ (GB)	■ (GBF)	■ (EBF)	■ (GZ)	■ (RS)	■ (ST)	■	■	■	■
 Sloping top 20% slope - 200 mm higher rear edge	○	■ (GS)	■ (GDS)	■ (GDTS)	■ (GBS)	■ (GBFS)	■ (EBFS)	■ (GZS)	■ (RSS)	■ (STS)	○			
 Without legs	■	■	■	■	■	■	■	■	■	■	■	■	■	■
 Plate legs H: 120 mm	○	○	○	○	○	○	○	○	○	○	○			
 Galvanized Closed plinth H: 120 mm	○	○	○	○	○	○	○	○	○	○	○		○	
 Pipe plinth H: 350 mm	○	○	○	○	○	○	○	○	○	○				
 Pipe plinth w/ bench H: 350 mm, Bench D: 300 mm	○	○	○	○	○	○	○	○	○	○				
 Wall hanging	○	○	○	○	○	○	○	○	○	○		■	○	○
 Wall hanging with bench D: 300 mm	○	○	○	○	○	○	○	○	○	○				
 Padlock	■	■	■	■	■	■	■	■	○	○	○	■○	■	■○
 Cylinder locks	○	○	○	○	○	○	○	○	■	■	■	■○	○	■○
 Currency / Deposit-payment lock	○	○	○		○	○	○	○					○	
 Manual code locks	○	○	○	○	○	○	○	○	○	○	○	○	○	
 Electronic code locks	○	○	○	○	○	○	○	○	○	○	○		○	○
 Single plate door	■	○	■○	■	■○	○		○	■		■	■○		■
 Double plate door	○	■	■○		■○	■	■	■		■		■○		




	Charging lockers	G/GS	GD/GDS	GDT/GDTS	GB/GBS	GBF/GBFS	EBF/EBFS	GZ/GZS	RS/RSS	ST/STS	PF	MB	VISION	Golf lockers
	Veneer / laminates / painted MDF doors	○	○	○		○		○				○	■	
	Acrylic doors				○	○								
	Sound proofed doors		○	○		○								
	Protect against vandalism						■							
	Letter slot H: 30 mm, W: 214/314 mm	○	○	○	○	○			○		■			
	Door stop	■	■	■	■	■	■	■		■	■			■
	Hanging rail with 2 double hooks		■	■	■	○	○	○	■				■	○
	Towel hook		■	■	■				■					■
	Shelves 1/1		○	○	■	○	○	○					○	○
	Shelves 3/4		■	○	■	○	○	○					■	○
	Divider		○	○	○								○	
	Bookshelf				○	○	○						○	○
	Galvanized shoe shelf		○	○	○									
	Power outlet	■	○	○	○		○	○						
	Thermal ventilation*	■	■ (G/GS)	■ (GD/GDS)	■ (GDT/GDTS)	■ (GB/GBS)	■ (GBF/GBFS)	■ (EBF/EBFS)	■ (GZ/GZS)	■ (RS/RSS)	■ (ST)		■	■
	Mechanical ventilation	○	■ (GS)	■ (GDS)	■ (GDTS)	■ (GBS)	■ (GBFS)	■ (EBFS)	■ (GZS)	■ (RSS)	■ (STS)	○		

VENTILATION SYSTEMS

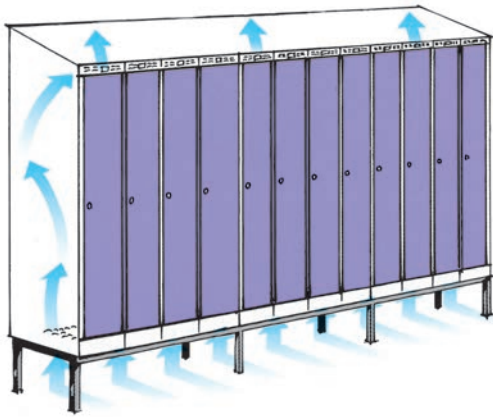

Blika standard ventilation


Blika lockers are ventilated with ordinary thermal ventilation. The air enters the locker through the perforated base and escape through the ventilation punching above the door. This eliminates moist and repellent smell from working clothes.

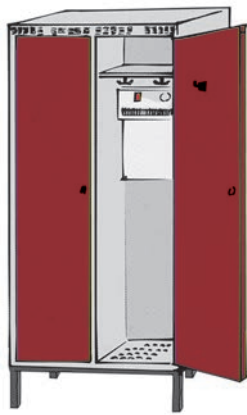

Type A, Blika individual solution. Mechanical thermal drying


With the Blika drying element, which is an adjustable, moisture controlled hot-air blaster, quick and very efficient individual drying of even wet working clothes is achieved for small installation costs.

The energy consumption is also low as drying takes place only when certain moisture is reached inside the locker. The system is mounted in every single locker and is particularly suited where a smaller number of employees work outside or in wet rooms.

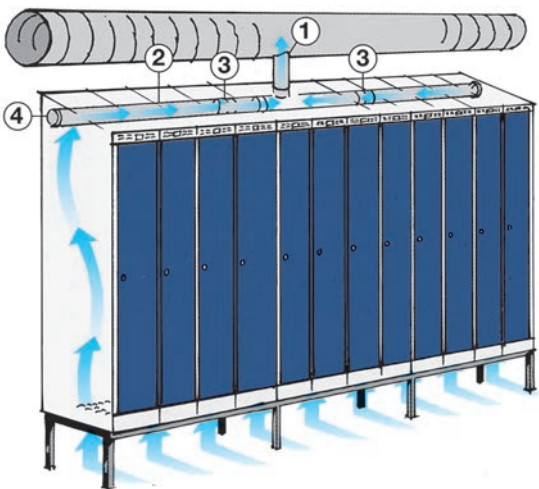

Type B, Blika ventilation, external, mechanical ventilation

The ventilation pipes in the lockers are connected to the ventilation system in the building and thereby create an underpressure in the lockers. This secures that repellent smell from dirty and moist working clothes is eliminated. Blika lockers type GS, GDS and GDTS are prepared for mounting of this solution. Blika can supply all pipe variations that are needed up till the pipe system outlet from the locker. The customer informs us of where the lockers are erected and where the outlets are to be placed. Then we supply the necessary number of pipes with ventilation holes, connectors, endplates and tees. The air capacity of the ventilation system must be 33 m³/h per linear meter locker. The max reach is 3 meter on each side of the outlet.

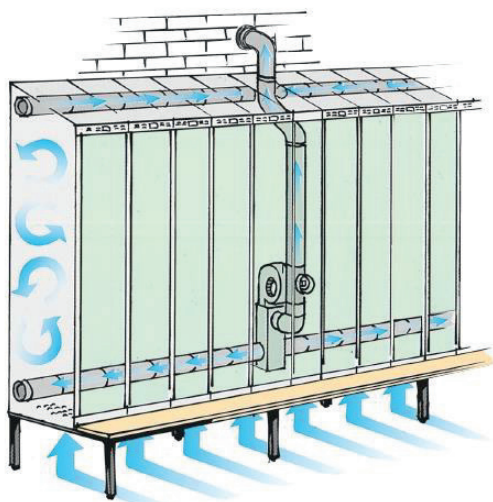

Type C, Blika mechanical drying ventilation. Re-circulation

With stepless, variable re-circulation a larger drying effect and energy-efficient ventilation of the locker is achieved. This results in both better drying of the clothes and daily airing of the room. If extra and quicker drying effect is needed, the heating element is connected and the temperature of the circulation air is raised up to 23°. The ventilator parts blow a strong, pre-heated air through the pipe in the base of the lockers. The over-pressure is then sucked out of the locker through a pipe in the top. The main part of the air sucked out of the lockers is re-circulated and an adjustable amount of air is passed out via the ordinary airing system. To utilise the full effect of the solution the lockers should be mounted with a drying rack, shoe rack and extra hooks. This allows high drying efficiency for small operation costs.

Technical data

	Type A	Type C
Electrical connection	220 V w/earth	220 V w/earth
Total efficiency	535 W	148/2820 W
Ventilation	25 W	148 W
Heat	500 W	2000 W
Capacity	100 m ³ /t	515 m ³ /t
Width	27,2 cm	20 cm
Height	56 cm	194 cm
Depth	9,5 cm	55 cm
Adjustable hygrostat control within 30-80 % RH	Yes	No
Temperature area		
Thermostat TCO protection against thermal overload	Yes	Yes
Other	Independent of ventilation system	Connect to ventilation system